



M SEALS UK LTD

- Part of Diploma PLC


M Seals UK Ltd,
Quartz Close, Enderby,
Leicester, LE19 4SG.

T: 0116 275 4720

F: 0116 275 4721

E: sales@m-seals.co.uk

W: www.m-seals.co.uk

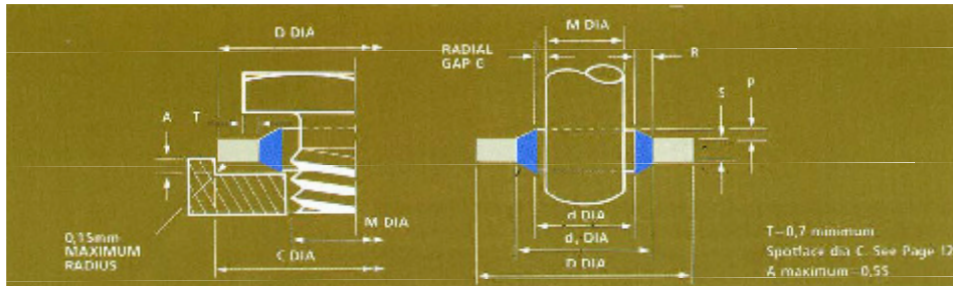

BSP RANGE

Thread Diam		Size Reference		D			S		R		P		Radial Gap G + 0,07		
Inch	BSP	***	†	+ 0,13	d ± 0,13	d ₁ ± 0,13		± 0,13			Inch	BSP			
6BA		001	1	6,35	3,05	4,09/4,16	1,22	+0,15 -0,00	0,54	0,20 /0,38	0,13				
4BA		002	2	7,26	4,12	5,26			0,57		0,26				
2BA		003	3	8,38	5,21	6,35			0,57		0,26				
1/4		004	4	13,21	6,86	8			0,57		0,26				
1/4		005	5	13,34	6,99	9,53			1,27		0,32				
5/16		006	6	13,34	8,31	9,53			0,56		0,19				
5/16		007	7	14,22	8,64	10,04			0,70		0,35				
3/8	1/8	020	A	15,88	10,37	11,84	2,00	±0,1	0,73	0,25/ 0,51	0,42	0,32			
-40		008	8	18,36	11,26	12,45			0,60		0,55				
7/16		009	9	19,05	11,69	13,08			0,70		0,29				
1/2	1/4	021	B	20,57	13,74	15,21			0,73		0,52	0,29			
9/16		010	10	22,23	14,86	16,39			0,76		0,29				
-60		022	BB	22,23	15,83	17,30			0,73		0,30				
5/8		011	11	25,40	16,51	18,75			1,12		0,32				
	3/8	023	C	23,80	17,28	18,75	0,73		0,31						
11/16		012	12	25,40	18,16	19,69	2,34		0,76		0,35				
3/4		024	CC	26,92	19,69	21,21			0,76		0,32				
13/16	1/2	025	D	28,58	21,54	23,01			0,73		0,45	0,29			
7/8	5/8	026	E	31,75	23,49	24,97			0,74		0,63	0,29			
15/16		013	13	33,27	24,26	26,04			0,89		0,23				
1	3/4	027	F	34,93	27,05	28,53			0,74		0,82	0,30			
1 1/16		028	FF	38,61	27,82	30,61			1,40		0,41				
1 1/8		014	14	36,58	29,33	30,86	3,25		0,76		0,38				
1 3/16	7/8	029	G	38,10	30,81	32,39			0,74		0,33	0,30			
1 1/4		015	15	41,40	32,64	35,69			1,52		0,45				
1 5/16	1	030	H	42,80	33,89	36,88			3,25		1,50	0,28	0,40		
1 5/16	1	031	HH	42,80	33,89	36,88			2,34		1,50	0,28	0,40		
1 3/8		016	16	44,45	35,94	38,99			3,25		+0,26 -0,00	1,52		0,51	
1 1/2		017	17	47,75	38,96	42,04						1,54		0,43	
1 5/8	1 1/4	032	J	52,38	42,93	45,93	1,50	0,82		0,51					
1 3/4		018	18	57,15	45,34	48,39	1,52	0,45							
1 7/8	1 1/2	033	K	58,60	48,44	51,39	1,47	0,40		0,32					
2		019	19	63,50	51,69	54,74	1,52	0,45							
2 1/8	1 3/4	034	L	69,85	54,89	58,30	1,70	0,45		0,57					
2 1/4		035	LL	70,36	58,04	61,09	1,52	0,45							
	2	036	M	73,03	60,58	63,63	1,52		0,48						
2 1/2		037	MM	77,72	64,39	67,44	1,52	0,45							
	2 1/4	038	N	79,50	66,68	69,98	1,65		0,59						
	2 1/2	039	P	90,17	76,08	79,38	1,65		0,45						

THESE RESULTS ARE FOR REFERENCE PURPOSES ONLY AND M SEALS UK LTD MAKES NO WARRANTY, EXPRESSED OR IMPLIED, THAT PARTS MANUFACTURED IN THIS COMPOUND WILL PERFORM SATISFACTORILY IN THE CUSTOMER'S APPLICATION. IT IS THE CUSTOMER'S RESPONSIBILITY TO TEST PARTS PRIOR TO THEIR USE.